




1204 | Pale Cherry



1206 | Light Classic

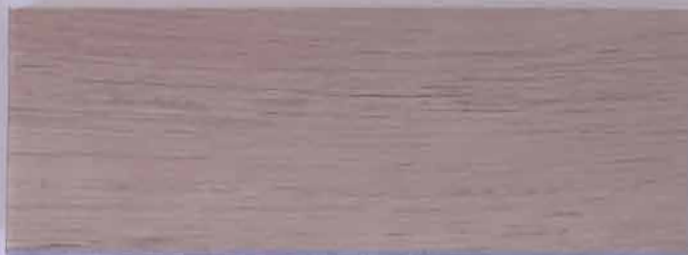

1242 | Brushed Timber



1203 | Honey Classic



1202 | Natural Timber



2729 | Golden Pine



2752 | Ethnic Oak



2544 | Italian Walnut



1205 | American Oak




2724 | Sensation Pine



1243 | Vermont Oak



2795 | Lego Block Pine •

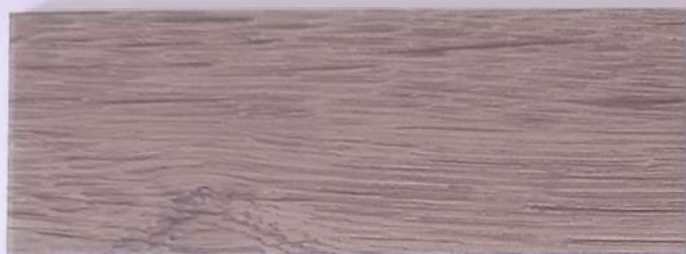

2785 | Sugar Brown



5713 | Mountain Pine



2786 | Nutty Brown •



5717 | Black Forest



2736 | Shale Oak



1235 | Brownie Teak



5715 | Moscado Pine



2766 | Espresso Dark



1227 | Washed Oak



1201 | Silvered Timber



1241 | Limed Oak



1239 | Weathered Oak



1240 | Midnight Grey



Office

1206 | Light Classic



2511 | Blond Oak



2754 | Ethnic Pine



1228 | Bleached Pine •

1200



1232 | Varnished Pine

1200



1238 | Aracaju Walnut

1200



1207 | Classic Hickory •

1200



1245 | Cottage Timber

1200




1236 | Tamarind Walnut

1200



1247 | Craft Oak

1200

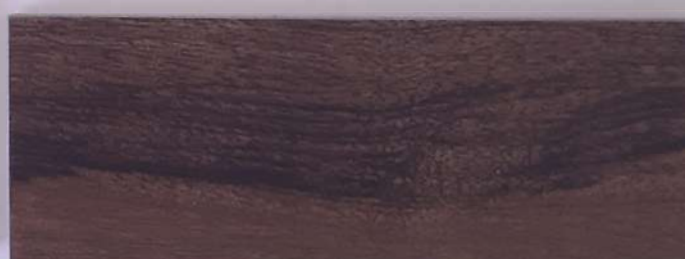

1237 | Salvador Walnut

1200



1231 | Aged Pine

1200



1208 | Heritage Hickory

1200

3.0(T)X180X1200(Wear Layer:0.55/0.3) | 2.5(T)X180X1200(Wear Layer:0.55) | 2.0(T)X180X1200(Wear Layer:0.3) [mm]

X-tra Wood



1246 | Glazed Oak

1200



1244 | White Forest

1200



1230 | Smoked Pine


1200

3.0(T)X450X450(Wear Layer:0.55 / 0.3) | 2.5(T)X450x450(Wear Layer:0.55) | 2.0(T)X450X450(Wear Layer:0.3) [mm]

Solid



1709 | Beige

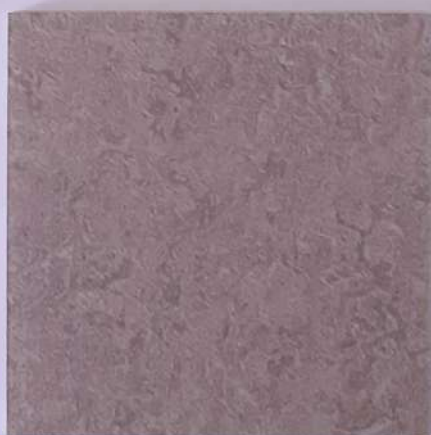

1710 | Light Brown



1711 | Black



1712 | Light Grey



1713 | Middle Grey




1714 | Dark Grey

DecoTile

51 styles available in 4 different specifications, suitable for both light and heavy commercial use.
Free of 6 types of harmful phthalate plasticizers: DOP, BBP, DBP, DIDP, DNOP, DINP

DecoTile Construction

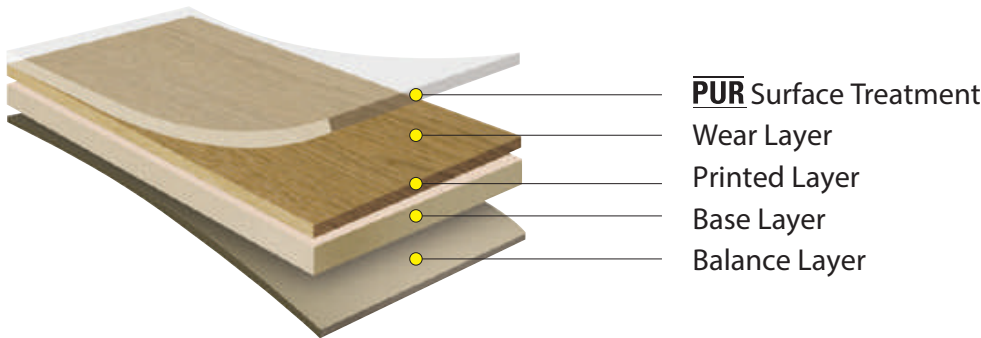

Technical Data

Characteristic	Standard	Unit	DecoTile			
		T	3.0		2.5	2.0
		W/L (mm)	0.55	0.3	0.55	0.3
Type of Flooring	EN ISO 10582		PVC Heterogeneous			
Surface Treatment			PUR			
Size	EN ISO 24342	%	≤ 0.15			
Straightness & Squareness		%	≤ 0.35			
Classification	EN 685		Class 23/33/42	Class 23/31	Class 23/33/42	Class 23/31
Over all Thickness	EN ISO 24346	mm	3.0	3.0	2.5	2.0
Wear Layer Thickness	EN ISO 24340	mm	0.55	0.3	0.55	0.3
Wear Resistance	EN 660-2		T			
Residual indentation	EN ISO 24343-1	mm	≤ 0.1			
Dimensional stability	EN ISO 23999	%	≤ 0.25			
Curling		mm	≤ 2			
Color Fastness to Light	EN ISO 105-B02		≥ 6			
Castor chair test	EN ISO 4918		No Change			
Burning Characteristic	EN 13501-1		Bfl-s1			
Chemical Resistance	EN ISO 26987		No Change			
Slip resistance	EN 13893		Class DS			
	DIN 51130		R9			
Warranty						
 Guarantee for manufacturing defects and wear-out*			10 Years	7 Years	10 Years	7 Years

* Warranty is valid only when installed in accordance with LG Hausys's Installation & Maintenance guide.